

M-LINE | FLR

LED Beacon



Multi-function **LED** beacon with high level optical performances.













Developed with a multi-level technology
the device allows **THREE** separate lighting effects:

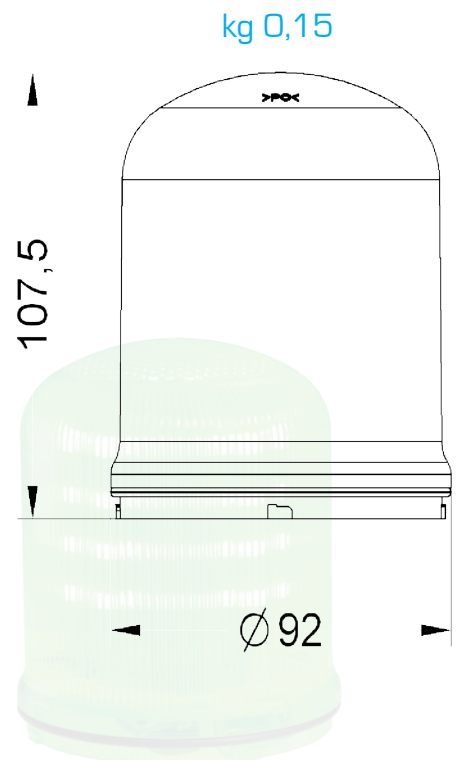
STEADY, ROTATING and FLASHING,
controllable via separate electric contacts,
ideal for numerous applications.






LED Beacon

FLR 12/24 DCAC

-  **Multi-function:** 3 separate functions (Steady, Rotating and Flashing), controllable independently via separate electric contacts
-  **High optical performances:**
 - **Steady:** a deep and rich light source ideal for attracting attention yet without disturbing
 - **Flashing:** a triple-flash (strobe effect) is the ideal solution for all applications where an immediate attention gain is mandatory
 - **Rotating:** a unique rotating effect which perfectly simulates the traditional rotating beacons yet without moving parts hence enormously enhancing product life time
-  **Four colours available:** red, amber, green and blue
-  **SMD LED technology:** better resistance to vibrations allows longer lifetime of the product (24 SMD LED soldered directly on the circuit), product life max 100.000 hours
-  **Polycarbonate dome in MAKROLON**
-  **Internal FR4 double face electronic circuit**
-  **Interface:** removable four-way terminal block, cable dimensions 2,5 mm max
-  **Multi-tension Base:** 12/24V DCAC and 90/240V AC
-  **Base-dome gasket:** O-RING VITON 75 SHORT A
-  **Three bases available:** SHALLOW, DEEP, WALL
-  **IP 65:** also excellent for outdoor use
-  **Snap-on fixing:** easy and safe installation procedures



with LT base with HT base

V 	12÷24		-	
V 	12÷24		90÷240	
mA	530	330	100	70
Flash/min.	0 / 3F: 85±10		r.p.m. 140±10	IP 65
On 	°C -30 +50		PC	self-extinguishing

CODES **90351** **90352** **90353** **90354**

Box Size 92x92x115 mm | **Box weight Kg.** 0,30