



OVOLUX R



> 3 BASES <
> 3 LUMINOUS SOURCES <



OVOLUX STEADY

SELF EXTINGUISHING	M16	Ba 15d	mA max 430	mA max 830
			5W	10W

OVOLUX FLASHING

Ba 15d	FPM 110 +/-20	mA max 430	mA max 830
		5W	10W

OVOLUX LED

LED SMD	FPM 120 +/-10	CPM 90 +/-10	CPM 140 +/-10	mA max 180
---------	---------------	--------------	---------------	------------

OVOLUX X

X XENON	-30/+40 °C	CPM 2F 65 +/-10	mA max 360
---------	------------	-----------------	------------

ALSO AVAILABLE



OVOLUX M
(with M16
cable gland)



OVOLUX E
(Edison
screw base)

OVOLUX

Luminous devices engineered for industrial applications on machinery.

Three versions available: flush mounting (R), with M16 cable gland (M) or with Edison screw base (E).

Different luminous sources:

- Incandescent lamp with Ba 15d socket (STEADY and STEADY/FLASHING versions)
- latest SMD LED technology (LED versions). Stock reduction due to multifunctionality
- flashing light with Xenon discharge tube (X versions).

KEY CHARACTERISTICS

LIGHT EFFECTS

OVOLUX STEADY: STEADY LIGHT

OVOLUX FLASHING: FLASHING LIGHT

OVOLUX LED: STEADY LIGHT, SINGLE FLASH, DOUBLE FLASH, TRIPLE FLASH

OVOLUX X: XENON FLASHING LIGHT

VOLTAGES

OVOLUX STEADY: 12/240V ACDC +/-10%

OVOLUX FLASHING: 12/48V DC, 24/240V AC +/-10%

OVOLUX LED: 12/24V ACDC, 90/240V AC +/-10%

OVOLUX X: 24V ACDC, 110V AC, 240V AC +/-10%

PROTECTION GRADE

IP65

OPERATING TEMPERATURE

-30/+50 °C | X: -30/+40 °C

MECHANICAL FEATURES

Polycarbonate dome and base. The R version can be mounted through the locking ring provided. Screw mounting, screws not included (M version) or with the Edison screw base (E version)


OPTICAL FEATURES

5W or 10W Incandescent lamp with Ba 15d socket (OVOLUX STEADY and FLASHING version)

SMD MULTI LED technology: 4 light effects (steady light, single flash, double flash, triple-flash) selectable via dip-switch

Xenon discharge tube: 2J double flash (2F)

CERTIFICATIONS




OVOLUX R
STEADY
FLASHING
LED

ACCESSORIES

OVOLUX MOUNTING ADAPTER
ADAPTER
(to mount the accessories)



DRAWINGS, DIMENSIONS AND WEIGHTS

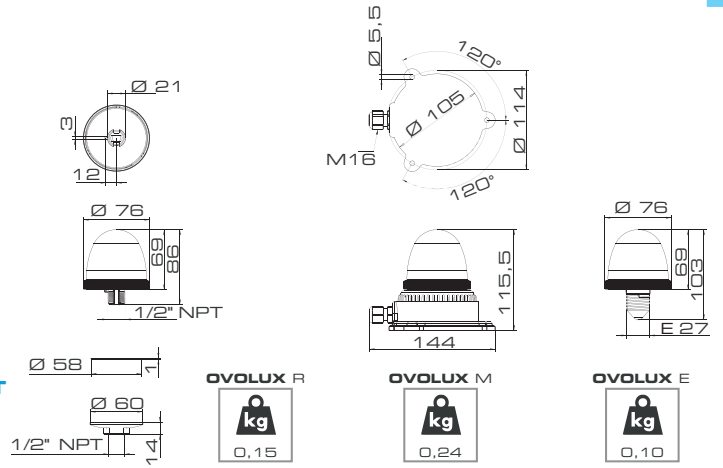

OVOLUX STEADY* - Steady light with incandescent bulb

BASES	■		■		■		■		■		■	
	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
R 12/240V ACDC	30011	30021	30012	30022	30013	30023	30014	30024	30015	30025	30016	30026
M 12/240V ACDC	30031	30041	30032	30042	30033	30043	30034	30044	30035	30045	30036	30046
E 12/240V ACDC	31331	31341	31332	31342	31333	31343	31334	31344	31335	31345	31336	31346

*Supplied without bulb

OVOLUX FLASHING* - Flashing light with incandescent bulb

BASES	■		■		■		■		■		■	
	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
R 12/48V DC	30051	30061	30052	30062	30053	30063	30054	30064	30055	30065	30056	30066
24/240V AC	30091	30101	30092	30102	30093	30103	30094	30104	30095	30105	30096	30106
M 12/48V DC	30071	30081	30072	30082	30073	30083	30074	30084	30075	30085	30076	30086
24/240V AC	30111	30121	30112	30122	30113	30123	30114	30124	30115	30125	30116	30126
E 12/48V DC	31421	31431	31422	31432	31423	31433	31424	31434	31425	31435	31426	31436
24/240V AC	31351	31361	31352	31362	31353	31363	31354	31364	31355	31365	31356	31366

*Supplied without bulb

OVOLUX LED - LED multifunctional light

BASES	■		■		■		■		■		■	
	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
R 12/24V ACDC	38781	39081	38782	39082	38783	39083	38784	39084	38785	39085	38786	39086
90/240V AC	38791	39091	38792	39092	38793	39093	38794	39094	38795	39095	38796	39096
M 12/24V ACDC	38801	39101	38802	39102	38803	39103	38804	39104	38805	39105	38806	39106
90/240V AC	38811	39111	38812	39112	38813	39113	38814	39114	38815	39115	38816	39116
E 12/24V ACDC	38881	39121	38882	39122	38883	39123	38884	39124	38885	39125	38886	39126
90/240V AC	38891	39131	38892	39132	38893	39133	38894	39134	38895	39135	38896	39136

OVOLUX X* - Flashing light with Xenon discharge tube

BASES	■		■		■		■		■		■	
	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
R 24V ACDC	30131	30141	30132	30142	30133	30143	30134	30144	30135	30145	30136	30146
110V AC	30171	30181	30172	30182	30173	30183	30174	30184	30175	30185	30176	30186
240V AC	30211	30221	30212	30222	30213	30223	30214	30224	30215	30225	30216	30226
M 24V ACDC	30151	30161	30152	30162	30153	30163	30154	30164	30155	30165	30156	30166
110V AC	30191	30201	30192	30202	30193	30203	30194	30204	30195	30205	30196	30206
240V AC	30231	30241	30232	30242	30233	30243	30234	30244	30235	30245	30236	30246
E 24V ACDC	31411	31441	31412	31442	31413	31443	31414	31444	31415	31445	31416	31446
110V AC	31371	31381	31372	31382	31373	31383	31374	31384	31375	31385	31376	31386
240V AC	31391	31401	31392	31402	31393	31403	31394	31404	31395	31405	31396	31406

*Supplied with bulb

SPARE DOMES

- 71115
- 71116
- 71117
- 71098
- 71099
- 71100

ACCESSORIES

	GY	BK		GY	BK
OVOLUX MOUNTING ADAPTER	27697	27698	DOUBLE WALL MOUNT	27763	27694
WALL MOUNT	27762	27693	EXTENDED FOOT L10	27764	27695