




FAROLAMP X S



> 2 BASES <
> XENON <

> EXCELLENT OPTICAL PERFORMANCE <

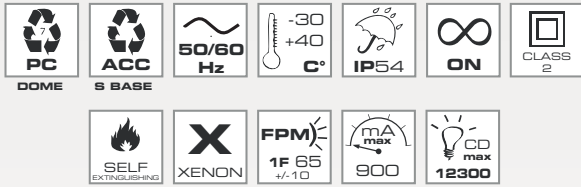

ALSO AVAILABLE



FAROLAMP X P

FAROLAMP X* | PART NO

	Blue	Orange	Red	Green	Yellow	White
S	12/24V ACDC					
	84969	84970	85044	85370	84968	85150
	110V AC					
	85048	85373	85031	85076	85032	85077
P	240V AC					
	85051	84971	85271	85371	84992	85151
	12/24V ACDC					
	84940	84978	85033	85049	85037	84977
P	110V AC					
	21938	84984	85144	85145	85146	85147
	240V AC					
	84980	84979	84982	85160	84995	85148
*Supplied with bulb						
SPARE DOMES						
	71326	71325	71328	71329	71293	71327

FAROLAMP X

Xenon flashing beacon engineered for industrial applications.

FAROLAMP X offers excellent optical performance.

2 bases available (standard S and pole mount P).

KEY CHARACTERISTICS

LIGHT EFFECTS
XENON FLASHING LIGHT

VOLTAGES
12/24V ACDC, 110V AC and 240V AC +/-10%

PROTECTION GRADE
IP54

OPERATING TEMPERATURE
-30/+40 °C






MECHANICAL FEATURES

Self-extinguishing PC dome
High impact resistance steel base. Screw mounting, screws not included (S base version)

OPTICAL FEATURES

6J Xenon discharge tube enhanced by the dome-shaped Fresnel lens provide a strong single flash (1F)

DRAWINGS, DIMENSIONS AND WEIGHTS



CERTIFICATIONS

