








ROTALLARM WP



- > WATERTIGHT STAINLESS STEEL BASE <
- > HIGH IP GRADE <
- > 3 LUMINOUS SOURCES <

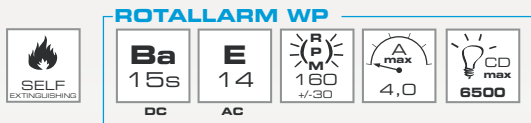

ALSO AVAILABLE



ROTALLARM WP
STEADY/FLASHING
ROTALLARM WP X

ROTALLARM WP

ROTALLARM WP LED is the latest addition to the most successful rotating beacon in Sirena's history, developed with watertight stainless steel base with threaded mount.

Available with 3 luminous sources ROTALLARM WP offers versatility as well as a complete range of products.

With its IP67 rating, ROTALLARM WP LED guarantees watertightness of the beacon.

KEY CHARACTERISTICS

LIGHT EFFECTS

ROTALLARM WP and ROTALLARM WP H1: ROTATING LIGHT

ROTALLARM WP STEADY/FLASHING: STEADY/FLASHING LIGHT

ROTALLARM WP FLASHING H1: FLASHING LIGHT

ROTALLARM WP X: XENON FLASHING LIGHT

VOLTAGES

ROTALLARM WP: 12V ACDC, 24V ACDC, 48V DC, 48V AC, 110V AC and 240V AC +/-10%

ROTALLARM WP H1: 12V ACDC, 24V ACDC +/-10%

ROTALLARM WP STEADY/FLASHING: 12/48V DC, 24/240V AC +/-10%

ROTALLARM WP FLASHING H1: 12V ACDC, 24V ACDC +/-10%

ROTALLARM WP X: 12/24V ACDC, 110V AC and 240V AC +/-10%

PROTECTION GRADE

IP67

OPERATING TEMPERATURE

-30/+50 °C | X: -30/+40 °C

MECHANICAL FEATURES

Self-extinguishing high impact resistance PC dome

Stainless steel base, 3/4" G threaded mount

Parallel axis gear drive (rotating version ROTALLARM WP and ROTALLARM WP H1)

OPTICAL FEATURES

ROTALLARM WP: anodized aluminium reflector with BA 15s 45W bulb (for 12V ACDC, 24V ACDC, 48V DC versions) or E14 25W bulb (for 48V AC, 110V AC and 240V AC versions)


ROTALLARM WP H1: anodized aluminium reflector with H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM WP STEADY/FLASHING: 40W Incandescent lamp with Ba 15d socket

ROTALLARM WP FLASHING H1: H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM WP X: Xenon discharge tube 6J, allows a high intensity single flash (1F)

DRAWINGS, DIMENSIONS AND WEIGHTS









ROTALLARM WP



CERTIFICATIONS









ROTALLARM WP* - Rotating beacon with incandescent bulb

						
	SS	SS	SS	SS	SS	SS
12V ACDC	90009	90010	90008	90007	90027	90028
24V ACDC	90017	90016	90014	90029	90015	90030
48V DC	90031	90024	90032	90033	90034	90035
48V AC	90036	90018	90022	90037	90038	90039
110V AC	90040	90025	90026	90041	90021	90042
240V AC	90210	90203	90205	90207	90204	90043







*Supplied with bulb

ROTALLARM WP H1* - Rotating beacon with halogen bulb

						
	SS	SS	SS	SS	SS	SS
12V ACDC	90047	90048	90044	90045	90049	90216
24V ACDC	90053	90050	90052	90046	90051	90055







*Supplied with bulb

ROTALLARM WP STEADY/FLASHING* - Steady/flashing light with incandescent bulb

						
	SS	SS	SS	SS	SS	SS
12/48V DC	90241	90242	90243	90244	90245	90246
24/240V AC	90251	90252	90253	90254	90255	90256







*Supplied without bulb

ROTALLARM WP FLASHING H1* - Flashing light with halogen bulb

						
	SS	SS	SS	SS	SS	SS
12V ACDC	90540	90558	90541	90565	90566	90567
24V ACDC	90568	90569	90516	90588	90517	90589

*Supplied with bulb

ROTALLARM WP X* - Flashing light with Xenon discharge tube

						
	SS	SS	SS	SS	SS	SS
12/24V ACDC	22061	22065	22066	22067	22068	22069
110V AC	90942	91528	91532	90943	90944	90542
240V AC	91527	91517	91524	91523	91520	91519

*Supplied with bulb