


ELYPS LM



> **LOW CONSUMPTION** <
> **RESISTANCE TO VIBRATIONS** <



DRAWINGS, DIMENSIONS AND WEIGHTS



ELYPS LM | PART NO

	allCOLOR	allCLEAR	PROXIMITY
■	32331	32341	32411
■	32332	32342	32412
■	32333	32343	32413
■	32334	32344	32414
■	32335	32345	32415
■	32336	32346	32416

ELYPS LM LIGHT MODULE

Integrated LED steady light module.

With its clear colors and simple functionality, ELYPS LM is the right choice for an entry-level stacklight module.

ELYPS LM offers versatility and good optical performance as well as virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life.

Available with allCOLOR, allCLEAR and Proximity lens, ELYPS LM is the right choice for an efficient stacklight module.

* At normal conditions, without vibrations and heavy temperature changes

KEY CHARACTERISTICS

LIGHT EFFECTS
STEADY

VOLTAGES
According to selected Wiring Module (WM)
With WM LT and WM LT MULTI: 24V ACDC
With WM HT and WM HT MULTI: 120/240V AC

PROTECTION GRADE
IP65, suitable for outdoor applications

OPERATING TEMPERATURE
-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP65 protection grade

OPTICAL FEATURES

6x LEDs (3 per side). The vertically lined lens allows a perfect light distribution over 360°. Available with 3 different lens types, according to the final application

allCOLOR STANDARD USE
Colored lens with colored light source. The use of a colored lens with the same-color light source allows optimization of the emission frequency producing a rich intense light output

allCLEAR USE IN VERY BRIGHT ENVIRONMENTS
Clear lens with colored light source. In very bright environments it is possible that the ambient brightness lights up the module when it is switched OFF creating problems in distinguishing between the ON and OFF state of the stacklight (phantom effect). The clear lens module allows clear distinction between the ON and OFF status of the stacklight



PROXIMITY USE NEAR THE OPERATOR
Opaline colored lens with colored light source. Ideal when the tower is installed near the operator. The opaline characteristic allows a optimally diffused light that avoids disturbing the operator




CERTIFICATIONS






- > HIGH BRIGHTNESS <
- > LOW CONSUMPTION <
- > RESISTANCE TO VIBRATIONS <

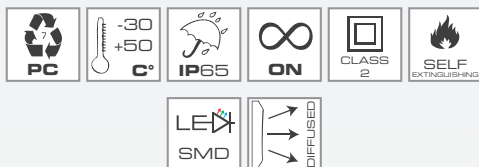

DRAWINGS, DIMENSIONS AND WEIGHTS



ELYPS LM S | PART NO

	allCOLOR	allCLEAR
	32371	32381
	32372	32382
	32373	32383
	32374	32384
	32375	32385
	32376	32386

ELYPS LM S LIGHT MODULE

Integrated bright LED steady light module.

With its clear colors and simple functionality, ELYPS LM S is the right choice for a high performance stacklight module.

ELYPS LM S offers versatility and good optical performance as well as virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life.

Available with allCOLOR and allCLEAR lens.

ELYPS LM S is the right choice for a high performance stacklight module.

* At normal conditions, without vibrations and heavy temperature changes

KEY CHARACTERISTICS

LIGHT EFFECTS
STEADY

VOLTAGES
According to selected Wiring Module (WM)
With WM LT and WM LT MULTI: 12/24V ACDC
With WM HT and WM HT MULTI: 120/240V AC

PROTECTION GRADE
IP65, suitable for outdoor applications

OPERATING TEMPERATURE
-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP65 protection grade

OPTICAL FEATURES

6x Bright LEDs (3 per side). The vertically lined lens allows a perfect light distribution over 360°. Available with 2 different lens types, according to the final application

allCOLOR STANDARD USE
Colored lens with colored light source.
The use of a colored lens with the same-color light source allows optimization of the emission frequency producing a rich intense light output

allCLEAR USE IN VERY BRIGHT ENVIRONMENTS
Clear lens with colored light source.
In very bright environments it is possible that the ambient brightness lights up the module when it is switched OFF creating problems in distinguishing between the ON and OFF state of the stacklight (phantom effect). The clear lens module allows clear distinction between the ON and OFF status of the stacklight



CERTIFICATIONS



ELYPS LM S MULTI

AUTOMAX
SIRENA




- > MULTIFUNCTION <
- > HIGH BRIGHTNESS <
- > LOW CONSUMPTION <
- > RESISTANCE TO VIBRATIONS <



PC	-30 +50 C°	IP65	ON	CLASS 2	SELF EXTINGUISHING
LED SMD	DIFFUSED	CPM 2F 46 ±.10	CPM 3F 71 ±.10	CPM 5F 72 ±.10	FPM new

DRAWINGS, DIMENSIONS AND WEIGHTS



ELYPS LM S MULTI | PART NO

	allCOLOR	allCLEAR
	32391	32401
	32392	32402
	32393	32403
	32394	32404
	32395	32405
	32396	32406

ELYPS LM S MULTI LIGHT MODULE

Integrated bright LED multifunctional light module.

Enriched by 4 light effects: double flash, triple flash, stroboscopic and random. The random effect consists in an uneven flashing pattern, augmenting the ability of catching attention.

ELYPS LM S MULTI offers versatility and good optical performance as well as virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life.

Available with allCOLOR and allCLEAR lens, ELYPS LM S MULTI is the right choice for a high performance multifunctional stacklight module.

* At normal conditions, without vibrations and heavy temperature changes

KEY CHARACTERISTICS

LIGHT EFFECTS

2x FLASH | 3x FLASH | 5x FLASH | RANDOM
Selectable via dip-switch

VOLTAGES

According to selected Wiring Module (WM)
With WM LT and WM LT MULTI: 12/24V ACDC
With WM HT and WM HT MULTI: 120/240V AC

PROTECTION GRADE

IP65, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP65 protection grade

OPTICAL FEATURES

6x Bright LEDs (3 per side). The vertically lined lens allows a perfect light distribution over 360°. Available with 2 different lens types, according to the final application

allCOLOR STANDARD USE

Colored lens with colored light source.
The use of a colored lens with the same-color light source allows optimization of the emission frequency producing a rich intense light output

allCLEAR USE IN VERY BRIGHT ENVIRONMENTS

Clear lens with colored light source.
In very bright environments it is possible that the ambient brightness lights up the module when it is switched OFF creating problems in distinguishing between the ON and OFF state of the stacklight (phantom effect). The clear lens module allows clear distinction between the ON and OFF status of the stacklight



CERTIFICATIONS






- > MULTIFUNCTION <
- > SUPERBRIGHT <
- > LOW CONSUMPTION <
- > RESISTANCE TO VIBRATIONS <



PC	-30 +50 C°	IP65	ON	CLASS 2	SELF EXTINGUISHING
LED SMD	DIFFUSED	CPM 2F 72 ±10	CPM 3F 71 ±10	CPM 5F 70 ±10	FPM RANDOM new

DRAWINGS, DIMENSIONS AND WEIGHTS



ELYPS LM X MULTI | PART NO

- 32351
- 32352
- 32353
- 32354
- 32355
- 32356

ELYPS LM X MULTI LIGHT MODULE

Integrated superbright LED multifunctional light module engineered to naturally substitute traditional Xenon discharge lamps modules.

Enriched by 4 light effects: double flash, triple flash, stroboscopic and random. The random effect consists in an uneven flashing pattern, augmenting the ability of catching attention.

ELYPS LM X MULTI offers versatility and good optical performance as well as virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life.

* At normal conditions, without vibrations and heavy temperature changes

KEY CHARACTERISTICS

LIGHT EFFECTS

2x FLASH | 3x FLASH | 5x FLASH | RANDOM
Selectable via dip-switch

VOLTAGES

According to selected Wiring Module (WM)
With WM LT and WM LT MULTI: 12/24V ACDC
With WM HT and WM HT MULTI: 120/240V AC

PROTECTION GRADE

IP65, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP65 protection grade

OPTICAL FEATURES

2x SuperBright LEDs (1 per side). The vertically lined lens allows a perfect light distribution over 360°

CERTIFICATIONS

