


P40 A LED



P40 A LED



> MULTICHANNEL <
> 85 dB max <

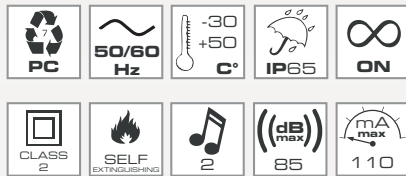

P40 A LED

Piezoelectrical sounder with LED light engineered for panel mounting.

Developed with a multichannel technology, the device allows three levels of alarm (alert, pre-alarm, alarm) controllable via independent electric contacts.

KEY CHARACTERISTICS

NUMBER OF TONES

2 (Intermittent sound - Continuous sound)

LIGHT EFFECTS

LEVEL 1: FLASHING LIGHT

LEVEL 2: FLASHING LIGHT + INTERMITTENT SOUND

LEVEL 3: STEADY LIGHT + CONTINUOUS SOUND

VOLTAGES

12/24V ACDC, 48/240V AC +/-10%

PROTECTION GRADE

IP65

OPERATING TEMPERATURE

-30/+50 °C

MECHANICAL FEATURES

Self-extinguishing PC body totally protected against vibrations, dust and atmospheric elements. Weather protection guaranteed by EPDM o-ring on dome and polyurethane gasket on base. Can be panel mounted through a 30mm hole and secured with the locking ring provided

ACOUSTIC FEATURES

Electronic circuit with multitension buzzer

Intermittent sound (pre-alarm)



Continuous sound (alarm)

Sound frequency: 3500+/-100Hz

OPTICAL FEATURES

3 bright LEDs. Transparent polycarbonate dome

DRAWINGS, DIMENSIONS AND WEIGHTS

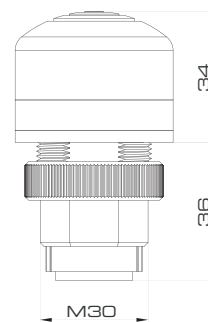

P40 A LED | PART NO

	Blue	Orange	Red	Green	Yellow	White
GY	12/24V ACDC					
	91181	91182	91183	91184	91185	91186
BK	48/240V AC					
	91201	91202	91203	91204	91205	91206

BK	12/24V ACDC					
	91191	91192	91193	91194	91195	91196
BK	48/240V AC					
	91211	91212	91213	91214	91215	91216

CERTIFICATIONS

